






Tolerance: 0.25(0.01)



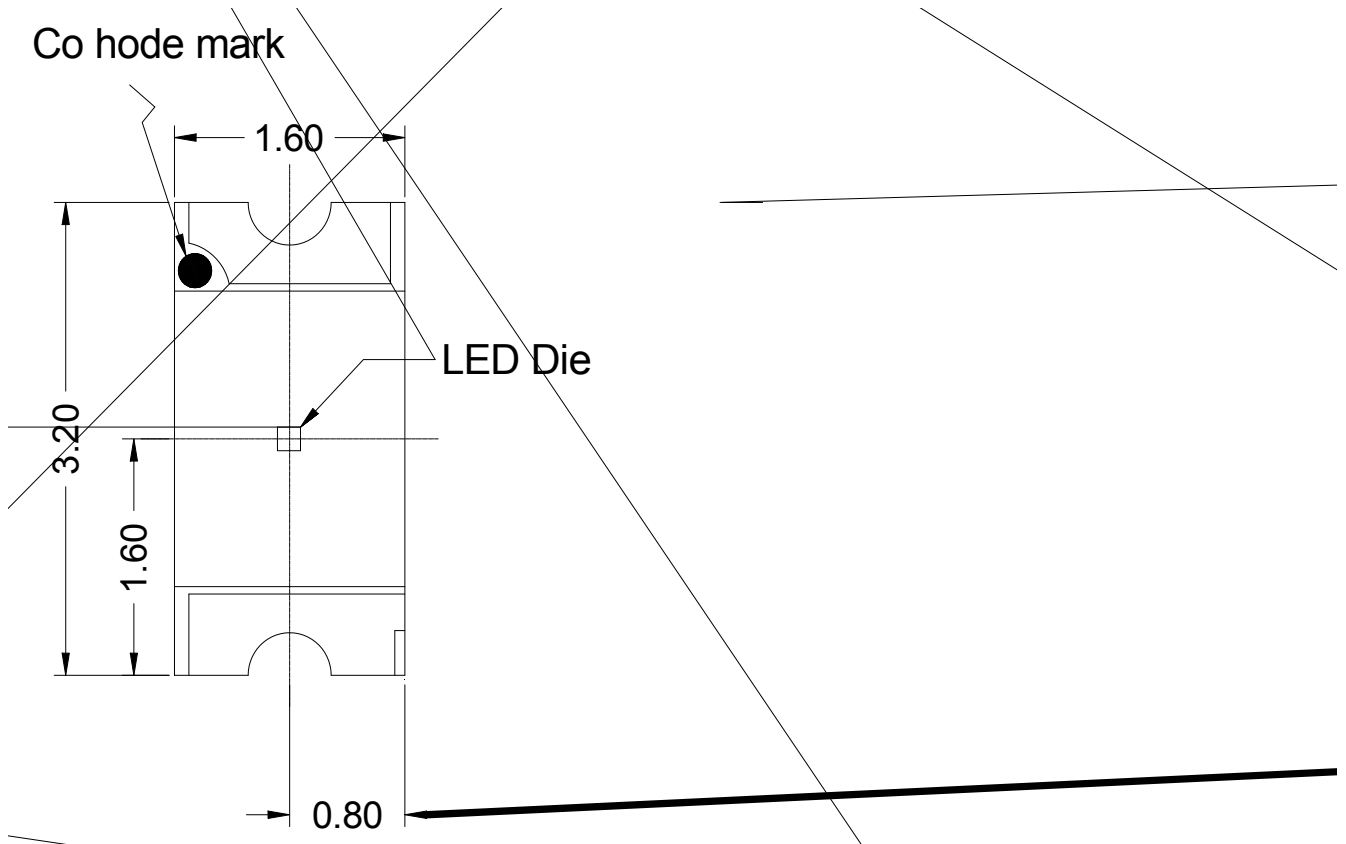

### 3 Charac eri ic

Forward c rren		If	30			mA
Re er e ol age		Vr	5			V
Po er di ipa ion		Pd	110			mW
Opera ing empera re range		Top	-25 +80			C
S orage empera re range		T g	-30 +80			C
Peak p l ing c rren 1/8 d f=1KH		Ifp	125			mA
Wa eleng h a peak emi ion	If=20mA	peak	620	630	635	nm
Spec ral half band id h	If=20mA			10		
For ard ol age	If=20mA	Vf	1.8	2.0	2.4	V
L mino in en i	If=20mA	I	200	300	400	mcd
Vie ing angle a 50% IV	If=10mA		--	120	--	Deg
Re er e c rren	Vr=5V	Ir	--	--	5	A



/

U ef l life	-	IF=20mA	100000		H
-------------	---	---------	--------	--	---

Typical Electrical/Optical Characteristic Curve  
(Ta=25°C unless otherwise noted)

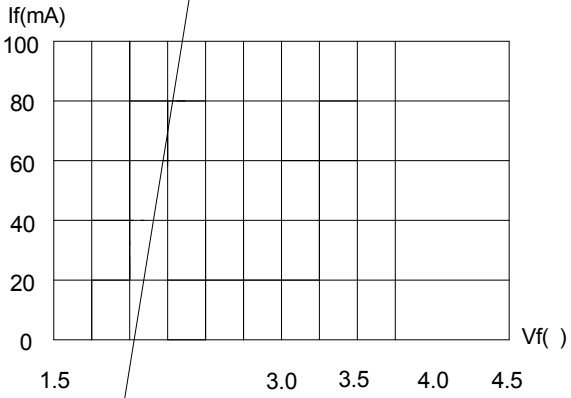


Fig.1 Forward Current vs Forward Voltage





স্বাক্ষর